

## Product Highlights

- Two line 16 character back lit display
- Two models of operation; display and EZcal
- Display mode: battery level, hours and error codes
- EZcal mode: calibrations, diagnostics and adjustments
- Easy and intuitive screen selection navigation
- Complete with mounting hardware
- Optional: customer specified front panel

### EZcal Mode



In EZcal mode perform Diagnostics, Adjustments, Setups & calibrations



Use Left Right arrows to select Menu Option



Use Up Down arrows to edit option



### Display Mode




Two line 16 character display configurable to display OEM specified parameters



## Technical Data

Power Supply	12/24V	8.5 to 33 Vdc
Bus. protocol	RS232	
Water Proof	IP66/IP54	See note 1
Working Temperatures	-20°C to +60°C	Ambient temperature
Overall Dimensions	4.375" x 3.563" x 0.871" 11.113 x 9.1 x 2.2 mm	L x W x H

## Dimensions

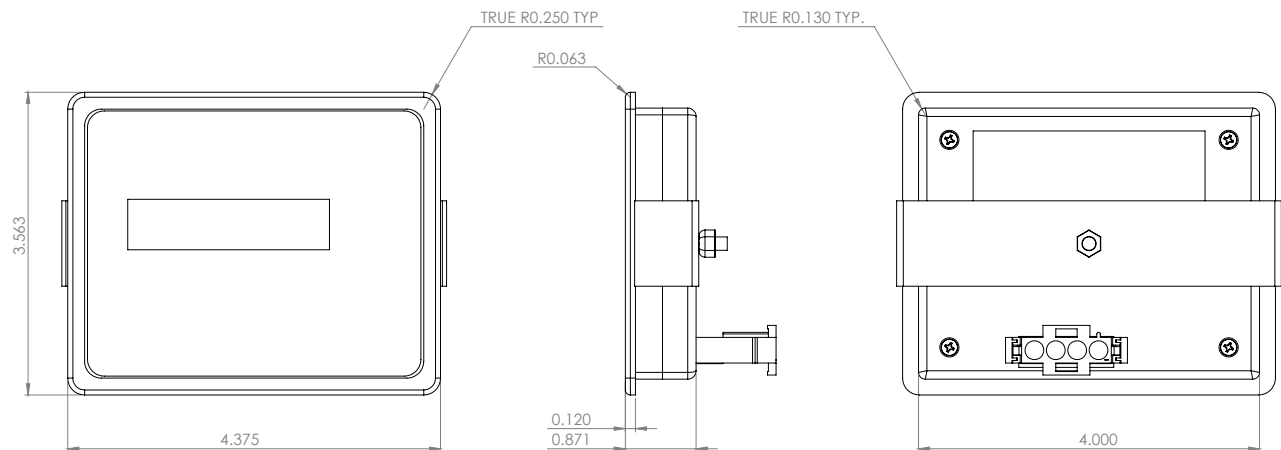

## Mounting Instructions

- The module should be mounted on a vertical surface:



Note 1: IP66 from the front  
IP54 from the back